

## FUSIBILI 6,3x32T TIPO UL/CSA

### Caratteristiche generali:

- Fusibili miniatura;
- Dimensioni: 6,3 x 32 mm;
- Caratteristica d'intervento: ritardato (T);
- Conformi alle norme: CEI 32-6/1, CEI 32-6/2, IEC 60127-1, IEC 60127-2, UL 248-14, CSA C22.2;
- Corpo in vetro;
- Contatti in rame argentato;
- Corrente nominale: da 32mA a 5A;
- Tensione nominale: 250V;
- Potere di interruzione: 35A;
- Confezione minima: 100 pezzi;

### Foto del prodotto / Product image




## UL/CSA TYPE 6,3x32T FUSES

### General characteristics:

- *Miniature fuses;*
- *Dimensions: 6,3 x 32 mm;*
- *Fusion characteristic: time-delay (T);*
- *Conform to standards: CEI 32-6/1, CEI 32-6/2, IEC 60127-1, IEC 60127-2, UL 248-14, CSA C22.2;*
- *Glass body;*
- *Silver plated contacts;*
- *Rated current: from 32mA to 5A;*
- *Rated voltage: 250V;*
- *Breaking capacity: 35A;*
- *Minimum packaging: 100 pieces;*

### Disegno / Drawing

(dimensioni in mm) / (dimensions in mm)

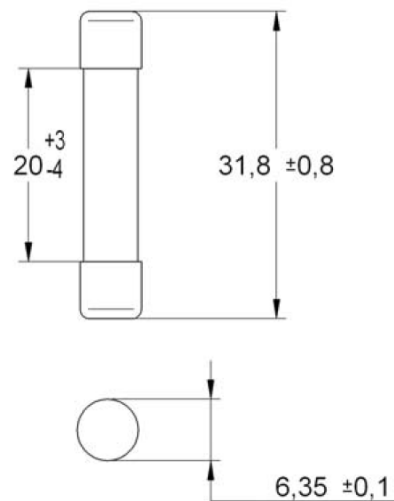

Pagine totali del documento: 3

Document total pages: 3

Ultimo aggiornamento: 2 Gennaio 2013

Last updated: 2 January 2013





## Codici per l'ordinazione:

## Ordering codes:



### FUSIBILI IN VETRO 6,3X32 T RITARDATI TIME-DELAY 6,3X32 T GLASS FUSES

codice IW - IW code

standard standard	con omologazione <sup>(2)</sup> with approval <sup>(2)</sup>	$I_n$ (A) $I_n$ (A)	$V_n$ (V) $V_n$ (V)	conf. <sup>(1)</sup> pack. <sup>(1)</sup>
	 			
—	0330032	32mA	250V	10-100
0310050	0330050	50mA	250V	10-100
0310063	0330063	63mA	250V	10-100
0310080	0330080	80mA	250V	10-100
0310100	0330100	100mA	250V	10-100
0310125	0330125	125mA	250V	10-100
0310160	0330160	160mA	250V	10-100
0310200	0330200	200mA	250V	10-100
0310250	0330250	250mA	250V	10-100
0310315	0330315	315mA	250V	10-100
0310400	0330400	400mA	250V	10-100
0310500	0330500	500mA	250V	10-100
0310630	0330630	630mA	250V	10-100
0310800	0330800	800mA	250V	10-100
0311001	0331001	1A	250V	10-100
0311251	0331251	1,25A	250V	10-100
0311601	0331601	1,6A	250V	10-100
0312002	0332002	2A	250V	10-100
0312502	0332502	2,5A	250V	10-100
0313153	0333153	3,15A	250V	10-100
0314004	0334004	4A	250V	10-100
0314005	0334005	5A	250V	10-100
0314306	—	6,3A	250V	10-100
0315008	—	8A	250V	10-100
0315010	—	10A	250V	10-100
0315012	—	12A	250V	10-100
0315015	—	15A	250V	10-100
0315020	—	20A	250V	10-100

(1) Imballo da 1000 pz, aggiungere \* al codice

(2) Confezione in sacchetti di plastica da 100 pz

(1) 1000 pcs packaging, add \* to the part number

(2) 100 pcs plastic bag packaging



**Curve caratteristiche tempo / corrente:**

***Time / current characteristic curves:***

