



INTERRUTTORI DIFFERENZIALI PURI TIPI SPECIALI

Caratteristiche generali:

- Interruttori differenziali serie EFI;
- Corrente nominale: fino a 63A;
- Prodotti di classe A (sensibili anche a correnti unidirezionali pulsanti);
- Numero poli: 2 (EFI 2) e 4 (EFI 4);
- Sensibilità differenziali: 30mA, 100mA, 300mA;
- Norme di riferimento: IEC EN 61008;
- Tensione di isolamento: 230V - 400V
- Sezione terminali: 1 – 25 mm²;

RESIDUAL CURR. CIRCUIT BREAKERS SPECIAL TYPES

General characteristics:

- Residual current circuit breakers EFI;
- Rated current: up to 63A;
- Products of class A (sensible also to unidirectional pulsating current);
- Poles number: 2 (EFI 2) and 4 (EFI 4);
- Residual current sensitivity: 30mA, 100mA, 300mA;
- Reference standards: IEC EN 61008;
- Insulating voltage: 230V - 400V;
- Terminal capacity: 1 – 25 mm²;

Foto dei prodotti / Products images




Pagine totali del documento: 4

Document total pages: 4

Ultimo aggiornamento: 3 dicembre 2019


Last updated: 3rd December 2019

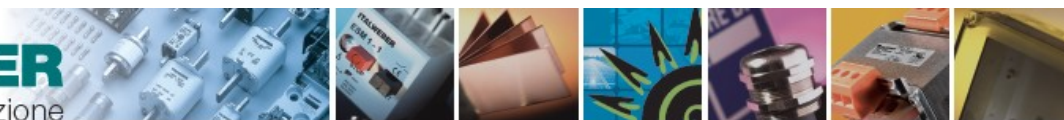**Modello a 2 poli – Tipo K ritardato****2 poles version – K short time delay**

Codice Code	In (A)	Classe diff. RCCB class	Sensibilità (mA) Residual current (mA)	Conf. pack.
2062727	25	A	30mA	1 / 6
2062728	40	A	30mA	1 / 6
2062729	63	A	30mA	1 / 6
2063727	25	A	100mA	1 / 6
2063728	40	A	100mA	1 / 6
2063729	63	A	100mA	1 / 6
2064727	25	A	300mA	1 / 6
2064728	40	A	300mA	1 / 6
2064729	63	A	300mA	1 / 6

Modello a 4 poli – Tipo K ritardato**4 poles version – K short time delay**

Codice Code	In (A)	Classe diff. RCCB class	Sensibilità (mA) Residual current (mA)	Conf. pack.
2062747	25	A	30mA	1 / 6
2062748	40	A	30mA	1 / 6
2062749	63	A	30mA	1 / 6
2063747	25	A	100mA	1 / 6
2063748	40	A	100mA	1 / 6
2063749	63	A	100mA	1 / 6
2064747	25	A	300mA	1 / 6
2064748	40	A	300mA	1 / 6
2064749	63	A	300mA	1 / 6

**Modello a 2 poli – Tipo selettivo****2 poles version – Selective type**


Codice Code	In (A)	Classe diff. RCCB class	Sensibilità (mA) Residual current (mA)	Conf. pack.
2063732	25	A	100mA	1 / 6
2063733	40	A	100mA	1 / 6
2063734	63	A	100mA	1 / 6
2064732	25	A	300mA	1 / 6
2064733	40	A	300mA	1 / 6
2064734	63	A	300mA	1 / 6

Modello a 4 poli – Tipo selettivo**4 poles version – Selective type**


Codice Code	In (A)	Classe diff. RCCB class	Sensibilità (mA) Residual current (mA)	Conf. pack.
2063752	25	A	100mA	1 / 6
2063753	40	A	100mA	1 / 6
2063754	63	A	100mA	1 / 6
2064752	25	A	300mA	1 / 6
2064753	40	A	300mA	1 / 6
2064754	63	A	300mA	1 / 6




Disegno EFI 2 (dimensioni in mm):

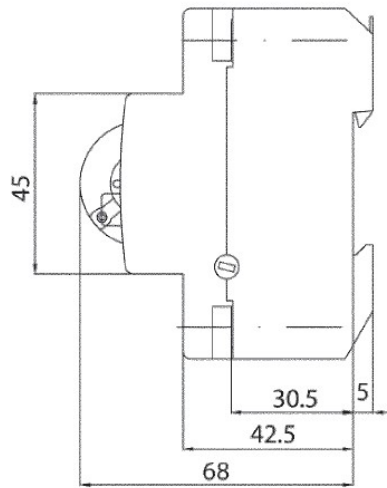

Drawing EFI 2 (dimensions in mm):

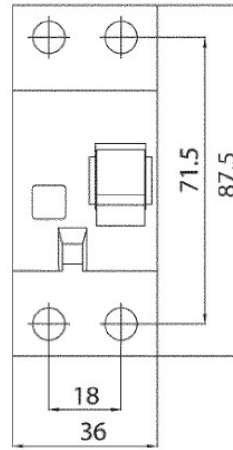

Disegno EFI 4 (dimensioni in mm):

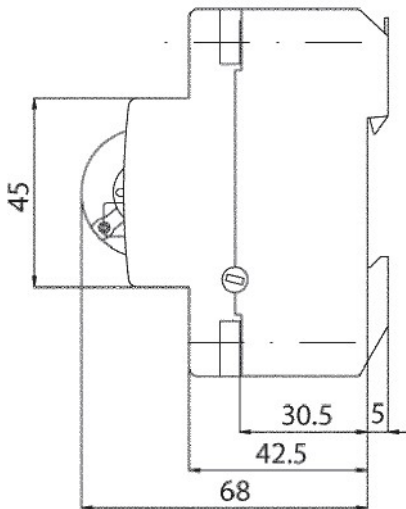

Drawing EFI 4 (dimensions in mm):

