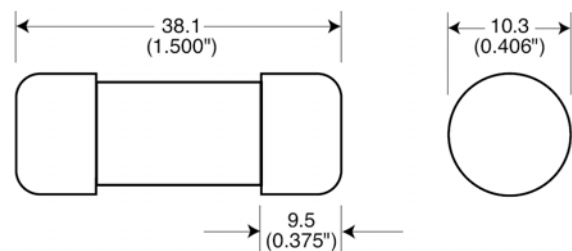


**FUSIBILI CH 10x38 aR – Serie FWC****Caratteristiche generali:**

- Tipo prodotto: fusibili cilindrici serie CH;
- Tipo: fusibili extrarapidi;
- Serie: FWC;
- Dimensioni: 10x38 mm;
- Caratteristica d'intervento: aR;
- Conformi alle norme: CEI 32-1, CEI 32-7, IEC 60269-1, IEC 60269-4;
- Corpo in steatite;
- Contatti in rame argentato;
- Corrente nominale: da 6A a 32A;
- Tensione nominale: 600V AC / DC;
- Potere di interruzione: 200kA (AC) / 50kA (DC);
- Confezione minima: 10 pezzi;
- Produttore: Bussmann;
- Con omologazione UR;

CH 10x38 aR FUSES – Series FWC**General characteristics:**

- *Product type: cylindrical CH fuses;*
- *Type: high speed fuses;*
- *Series: FWC;*
- *Dimensions: 10x38 mm;*
- *Time-current characteristic: aR;*
- *Conform to standards: CEI 32-1, CEI 32-7, IEC 60269-1, IEC 60269-4;*
- *Steatite body;*
- *Silver plated contacts;*
- *Rated current: from 6A to 32A;*
- *Rated voltage: 600V AC / DC;*
- *Breaking capacity: 200kA (AC) / 50kA (DC);*
- *Minimum packaging: 10 pieces;*
- *Manufacturer: Bussmann;*
- *With UR approval;*


**Foto del prodotto
Product image****Disegno (dimensioni in mm e in pollici)
Drawing (dimensions in mm and in inches)**

Pagine totali del documento: 3

Document total pages: 3

Ultimo aggiornamento: 10 Febbraio 2015

Last update: 10th February 2015

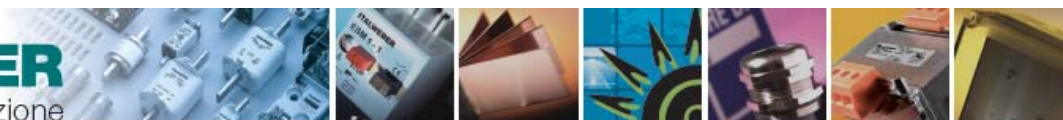

Codici per l'ordinazione:

Ordering codes:

Grandezza Size	Codice / Code CH aR	In (A)	Vn (V) AC / DC	Conf. Pack.
FWC (10x38)	1774006	6	600	10
	1774008	8	600	10
	1774010	10	600	10
	1774012	12	600	10
	1774015	16	600	10
	1774020	20	600	10
	1774025	25	600	10
	1774032	32	600	10

Altre caratteristiche

Other characteristics

Grandezza Size	In (A)	Pw (W)	I2t prearco (A2s) prearcing I2t (A2s)	I2t totale (A2s) a 690V total I2t (A2s) at 690V
FWC (10x38)	6	1,5	4	30
	8	2	6	50
	10	2,5	9	70
	12	3	15	120
	16	3,5	25	150
	20	4,8	34	260
	25	6	60	390
	32	7,5	95	600



Curve caratteristiche tempo / corrente:

Time / current characteristic curves:

